

AgCam

Ruggedized Rear View and Surveillance Equipment



Dakota Micro, Inc.

CAMERAS MADE IN THE U.S.A.



WHY IS THE AGCAM RIGHT FOR ME?

If you're looking for a ruggedized camera system that can withstand anything and everything you can throw at it, then you're in the right place.

The AgCam camera system is the most durable, dependable and user friendly camera system available to the agricultural, industrial, and public works market today.

The AgCam's sister product, the EnduraCam, was developed for harsh use in the military and public works market, giving the AgCam the genetics to give you the quality you have been searching for.

AgCam cameras are available with your choice of focal distances and viewing widths, ranging from a 3.6mm lens with a 92° field of view; perfect for a backup or side view camera, up to a 16mm lens, offering a 15° field of view, allowing for excellent viewing in surveillance applications.

When you add in the wide variety of adaptor cables that allow you to hook up to nearly any third party monitor available, the AgCam is the right product at the right price.

See What's Behind You



WHY DO PEOPLE LOVE AGCAM?

The AgCam system has been designed and manufactured to give you a product that will last for years, even in the harshest environments. With cameras that are 100% waterproof, 10G shock and vibration certified and feature an unmatched 3 year warranty, there is no better camera for use in even the toughest situations. With most electronics being imported from overseas, Dakota Micro is proud to manufacture the AgCam cameras in North America.

AGCAM LENS SELECTION GUIDE

	3.6MM CAMERA	6MM CAMERA	12MM CAMERA	16MM CAMERA
VIEWING ANGLE	 92°	 53°	 22°	 15°
CAMERA LOCATED 100FT FROM VEHICLE				
CAMERA LOCATED 50FT FROM VEHICLE				
COMMON USES	<ul style="list-style-type: none"> Close monitoring of moving parts Unloading Trucks/ Semi Material Loading & Unloading Machine Hopper Backup Camera 	<ul style="list-style-type: none"> Rear View for Tractor or Truck Monitor Sprayer Booms Large Augers and Conveyors Unloading Spouts Monitor Gauges 	<ul style="list-style-type: none"> Surveillance Inside Buildings Site Security & Surveillance 	<ul style="list-style-type: none"> Monitor Outside Buildings Monitoring Outdoor Traffic

CAMERA DETAIL/SPECIFICATIONS

CAMERA WARRANTY	3 YEARS
VIDEO SYSTEM	NTSC (SILVER ANODIZED) / PAL (BLACK ANODIZED)
SHOCK RESISTANCE	10G CERTIFIED
VIBRATION RESISTANCE	10G CERTIFIED
INFRARED CAPABILITY	50+ FEED IN 100% DARKNESS
IR TYPE	900NM HIGH INTENSITY LED'S
92 DEGREE FIELD OF VIEW	3.6MM LENS
OPTIONAL BACKUP VIEWING ANGLE	53° FIELD OF VIEW (6MM LENS)
OPTIONAL NARROW VIEWING ANGLE	22° FOV (12MM LENS) OR 15° FOV (16MM LENS)
COUNTRY OF MANUFACTURE	USA
IMAGE PICK-UP DEVICE	SONY 1/3" SUPER HAD CCD SENSOR
HORIZONTAL RESOLUTION	720 HORIZONTAL TV LINES
MINIMUM ILLUMINATION	0 LUX @ F2.0
OPERATING TEMPERATURE	-45° - 150° (-42°C - 66°C)
OUTER CONSTRUCTION	8018 ALUMINUM BILLET
OUTER FINISH	TYPE 2 HARD ANODIZED
CAMERA LENS	TRIPLE HARDENED GLASS
WATERPROOFING CRITERIA	IP 69 (WATERPROOF TO HIGH PRESSURE DIRECT SPRAY)
BODY DIMENSIONS	53 (W) X 58 (L) MM (BODY ONLY)
ELITE CAMERA FUNCTIONS	ABILITY TO ON BOARD MIRROR OR TURN IR ON/OFF



9 INCH AGCAM KITS

AgCam 9 inch monitors are available with or without a built in quad processor. 9 inch AgCam monitors with a built in quad processor allows for viewing of 4 cameras simultaneously. All monitors include individual camera triggers, allowing users to activate cameras with a pre-determined event, like backing up.

AGCAM 9 INCH MONITOR KIT

PN: DMAC-9M

- Qty 1 - 9in LED Backlit Monitor w/ 4 Camera Inputs
- Qty 1 - Monitor Remote Control (DMAC-REMOTE)
- Qty 1 - 9in Monitor Stand (DMAC-9M-BRACKET)
- Qty 1 - 12v Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty 1 - A/C Power Adaptor (DMAC-PA)



AGCAM 9 INCH QUAD MONITOR KIT

PN: DMAC-9MQ

- Qty 1 - 9in LED Backlit Quad Monitor w/ 4 Camera Inputs
- Qty 1 - Monitor Remote Control (DMAC-REMOTE)
- Qty 1 - 9in Monitor Stand (DMAC-9M-BRACKET)
- Qty 1 - 12v Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty 1 - A/C Power Adaptor (DMAC-PA)



AGCAM 9 INCH SINGLE CAMERA KIT

PN: DMAC-9M-C1

- Qty. 1 - 9in LED Backlit Monitor - Stand & Remote
- Qty. 1 - 3.6mm AgCam Camera (DMAC-RC)
- Qty. 1 - 20ft Cable w/ Watertight Connectors (DMAC-EC20)
- Qty. 1 - 60ft Cable w/ Watertight Connectors (DMAC-EC60)
- Qty. 1 - 12v Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - A/C Power Adaptor (DMAC-PA)



AGCAM 9 INCH DOUBLE CAMERA KIT

PN: DMAC-9M-C2

- Qty. 1 - 9in LED Backlit Monitor - Stand & Remote
- Qty. 2 - 3.6mm AgCam Camera (DMAC-RC)
- Qty. 2 - 20ft Cable w/ Watertight Connectors (DMAC-EC20)
- Qty. 2 - 60ft Cable w/ Watertight Connectors (DMAC-EC60)
- Qty. 1 - 12v Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - A/C Power Adaptor (DMAC-PA)



AGCAM 9 INCH QUAD DOUBLE CAMERA KIT

PN: DMAC-9MQ-C2

- Qty. 1 - 9in LED Backlit Quad Monitor - Stand & Remote
- Qty. 2 - 3.6mm AgCam Camera (DMAC-RC)
- Qty. 2 - 20ft Cable w/ Watertight Connectors (DMAC-EC20)
- Qty. 2 - 60ft Cable w/ Watertight Connectors (DMAC-EC60)
- Qty. 1 - 12v Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - A/C Power Adaptor (DMAC-PA)



WHAT IS THE DIFFERENCE BETWEEN NTSC AND PAL?

NTSC and PAL are two types of color encoding systems. NTSC delivers a frame rate of 30 frames per second (fps) at an aspect ratio of 720x480. PAL utilizes a frame rate of 25 fps and an aspect ratio of 720x576.

NTSC video standard is popular in North America and Japan, while PAL format is more common in countries such as the UK, Australia and Sweden.

WHAT IS THE BEST RESOLUTION FOR AN ANALOG CAMERA?

The maximum possible resolution over analog composite video is 720x480 for NTSC and 720x576 for PAL. Any additional resolution above that means that information has to be "removed" in order to send it to the receiving monitor. While many modern analog cameras boast frame rates of 700 or 800 lines of resolution, in reality, anything over 480 lines is removed before it reaches the screen and gives you no added visual benefit.

7 INCH AGCAM KITS

AgCam monitors are available in a more compact 7 inch size. All monitors include individual camera triggers, allowing users to activate cameras with a pre-determined event, like backing up.

AGCAM 7 INCH MONITOR KIT

PN: DMAC-7M

- Qty 1 - 7in LED Backlit Monitor w/ 4 Camera Inputs
- Qty 1 - Monitor Remote Control (DMAC-REMOTE)
- Qty 1 - 7in Monitor Stand (DMAC-7M-BRACKET)
- Qty 1 - 12v Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty 1 - A/C Power Adaptor (DMAC-PA)



AGCAM 7 INCH SINGLE CAMERA KIT

PN: DMAC-7M-C1

- Qty. 1 - 7in LED Backlit Monitor - Stand & Remote
- Qty. 1 - 3.6mm AgCam Camera (DMAC-RC)
- Qty. 1 - 20ft Cable w/ Watertight Connectors (DMAC-EC20)
- Qty. 1 - 60ft Cable w/ Watertight Connectors (DMAC-EC60)
- Qty. 1 - 12v Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - A/C Power Adaptor (DMAC-PA)



AGCAM 7 INCH DOUBLE CAMERA KIT

PN: DMAC-7M-C2

- Qty. 1 - 7in LED Backlit Monitor - Stand & Remote
- Qty. 2 - 3.6mm AgCam Camera (DMAC-RC)
- Qty. 2 - 20ft Cable w/ Watertight Connectors (DMAC-EC20)
- Qty. 2 - 60ft Cable w/ Watertight Connectors (DMAC-EC60)
- Qty. 1 - 12v Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - A/C Power Adaptor (DMAC-PA)



AGCAM CAMERA KITS

AGCAM CAMERA & CABLE KITS

Kits include 1 camera, 1 Camera Mounting Bracket w/ Magnetic Base Kit. (1) 36in Camera Pigtail, (1) 20ft Power/Video Extension Cable, (1) 60ft Power/Video Extension Cable

- PN: DMAC-C1 Kit Includes a 3.6mm Camera - 92° FOV
- PN: DMAC-C1-6 Kit Includes a 6mm Camera - 53° FOV
- PN: DMAC-C1-12 Kit Includes a 12mm Camera - 22° FOV
- PN: DMAC-C1-16 Kit Includes a 16mm Camera - 15° FOV



AGCAM PAL CAMERA & CABLE KITS

Kits include 1 camera, 1 Camera Mounting Bracket w/ Magnetic Base Kit. (1) 36in Camera Pigtail, (1) 20ft Power/Video Extension Cable, (1) 60ft Power/Video Extension Cable. Also available without cables
PN: DMAC-RC-___-PAL.

- PN: DMAC-C1-PAL Kit Includes a 3.6mm Camera - 92° FOV
- PN: DMAC-C1-6-PAL Kit Includes a 6mm Camera - 53° FOV
- PN: DMAC-C1-12-PAL Kit Includes a 12mm Camera - 22° FOV
- PN: DMAC-C1-16-PAL Kit Includes a 16mm Camera - 15° FOV



AGCAM CAMERAS

Kits include AgCam camera with Mounting bracket & magnet.

- PN: DMAC-RC Kit Includes a 3.6mm Camera - 92° FOV
- PN: DMAC-RC-6 Kit Includes a 6mm Camera - 53° FOV
- PN: DMAC-RC-12 Kit Includes a 12mm Camera - 22° FOV
- PN: DMAC-RC-16 Kit Includes a 16mm Camera - 15° FOV



AGCAM ELITE CAMERA KITS

Elite AgCam camera kits feature a built in mirror and IR on/off function for use with 3rd party monitors that do not include a mirror function.

- PN: DMAC-C1-E Kit Includes Elite AgCam with 20' and 60' cables
- PN: DMAC-RC-E Kit Includes Elite AgCam Camera
- PN: DMAC-RC-E-___ Includes Elite AgCam Camera with custom lens



AGCAM ACCESSORIES

The AgCam camera line also offers a wide variety of accessories giving you many new options such as the ability to record, all the way to making your camera feed wireless.

DIGITAL VIDEO RECORDER

PN: DMAC-1DVR

- Qty. 1 - Mini Digital Video Recorder
- Qty. 1 - USB SD Card Reader w/ 8GB SD Card
- Qty. 2 - RCA Adaptor w/ BNC to RCA Adaptors
- Qty. 1 - 12V (DMAC-12V) & A/C (DMAC-PA) Power adaptors
- Qty. 1 - Television Adaptor (DMAC-TVA)
- Qty. 1 - AgCam Monitor to RCA Male (DMAC-AC-M)

FULL COLOR QUAD PROCESSOR

PN: DMAC-Q

- Qty. 1 - Quad Processor
- Qty. 1 - Quad Power Harness (DMAC-QPH)
- Qty. 1 - Quad Video Input Harness (DMAC-QWH)
- Qty. 1 - Remote Location Control Box (DMAC-Q-RCB)
- Qty. 1 - 12V Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - A/C Power Adaptor (DMAC-PA)

ADAPTOR CABLES

- AGCAM CAMERA TO OVERVIEW/CABCAM MONITOR (DMAC-OVM)
- OVERVIEW/CABCAM CAMERA TO AGCAM MONITOR (DMAC-OVC)
- AGCAM CAMERA TO JD 2630 THREE CAMERA (DMAC-JD3C)
- AGCAM CAMERA TO JD COMMAND CENTER (DMAC-JDCOC)
- AGCAM CAMERA TO JD 6R COMMAND CENTER (DMAC-JDC6R)
- AGCAM CAMERA TO COMMANDVIEW II CAB (DMAC-JD2COC)
- AGCAM CAMERA TO CAT/ORLACO (DMAC-CAT1)
- AGCAM CAMERA TO CLAAS/LEXION (DMAC-CLS)
- AGCAM CAMERA TO USB (DMAC-2USB)
- AGCAM CAMERA TO TOPCON X30/AGCO C3000 (DMAC-USB1-TC)
- AGCAM CAMERA TO AUDIOVOX (DMAC-ADVX-M)
- AGCAM CAMERA TO BNC MALE W/POWER (DMAC-DVR-P)
- AGCAM CAMERA TO CNH INTELLIVIEW ONE CAMERA (DMAC-CN1)
- AGCAM CAMERA TO CNH INTELLIVIEW THREE CAMERA (DMAC-CN3)
- AGCAM CAMERA TO CNH 7-PIN MINI AMP (DMAC-CN1F)
- AGCAM CAMERA TO TRIMBLE (DMAC-TRMBL-FMX)
- AGCAM CAMERA TO AGLEADER (DMAC-ALI)
- AGCAM CAMERA TO THREADED COLLAR S-VIDEO FEMALE/MOTEC (DMAC-MTC)

- AGCAM CAMERA TO THREADED COLLAR S-VIDEO MALE/MOTEC (DMAC-MTM)
- AGCAM CAMERA TO MUELLER MONITOR (DMAC-MLR01)
- AGCAM CAMERA TO CAT5/RJ45 (DMAC-BO24-F)
- AGCAM MONITOR TO CAT5/RJ45 (DMAC-BO24-M)
- CAT5/RJ45 TO BNC MALE W/ POWER & VIDEO (DMAC-BO24)
- CAT5/RJ45 TO BNC MALE WITH POWER, VIDEO & DATA (DMAC-BO22)
- AGCAM CAMERA 4 CAMERA DVR KIT (DMAC-DR-KIT)
- AGCAM CAMERA TO TELEVISION (DMAC-TVA)
- AGCAM CAMERA TO BNC FEMALE (DMAC-SCA)
- AGCAM CAMERA COILED TRAILER KIT (DMAC-TCK)
- AGCAM CAMERA TO BNC MALE W/POWER (DMAC-DVR-P)
- AGCAM CAMERA TO BNC FEMALE W/ SEPARATE POWER (DMAC-SSA)
- AGCAM CAMERA TO VERSATILE MONITOR (VER-WAC11)
- AGCAM CAMERA TO KUHN CCI100 (DMAC-KH1)
- AGCAM CAMERA TO FENDT VARIOTERMIAL (AC-FDT01)
- AGCAM CAMERA TO AGCO C1000 MONITOR (AC-A1C)
- AGCAM CAMERA TO AGCO C2000 MONITOR (AC-A2C)
- AGCAM CAMERA TO AGCO GTA MONITOR (AC-GTA)

WIRELESS KITS

STANDARD WIRELESS PAIR

FEATURES

- Allows for easy wireless upgrade to your AgCam system.
- Your receiver can be conveniently powered from your AgCam monitor for mobile applications.
- Easy access RCA output jacks enable you to directly view the image on your own television.
- You can have as many as 4 cameras, each on their own wireless channel available to view.
- Optional larger antennas allow you to view cameras up to 3+ miles away (with line of sight).
- All transmitters and receivers are available individually.
- Transmits on powerful and reliable 2.4GHz bandwidth.

PN: DMAC-RHPAIR

- Qty. 1 - Wireless Transmitter, 4-channel (DMAC-RHTX)
- Qty. 1 - Wireless Receiver, 4-channel (DMAC-RHRX)
- Qty. 2 - 3dBi Antenna (Transmission up to 2,000ft)
- Qty. 2 - 12V Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 2 - A/C Power Adaptor (DMAC-PA)
- Qty. 2 - RCA Adaptor



Channels	Transmitter & receiver - 4 Selectable Channels
CH1 Frequency	2.411 GHz
CH2 Frequency	2.431 GHz
CH3 Frequency	2.451 GHz
Ch4 Frequency	2.471 GHz
Video In/Out	1Vp-p (NTSC/PAL)
Audio In/Out	600 ohms (NTSC/ 10K Ohms (PAL) - AgCam cameras not audio capable
A/V connections	A/V Jack-RCA to RCA line jacks or AgCam plug
Antenna	Detachable dipole antenna (optional larger antennas available)
Operating Voltages	DV 9V-12V/1500mA power adaptor
Temperature Limit	Not to Exceed 120 degrees F
Calculated RF Exposure	0.71 [at d=cm (mW/cm2)]

DON'T SEE THE ADAPTOR YOUR LOOKING FOR? CONTACT US OR CHECK OUR WEBSITE AT WWW.AGCAM.COM

WIRELESS RECEIVER

PN: DMAC-RHRX



- Qty. 1 - Wireless Receiver, 4-channel
- Qty. 1 - 3dBi Antenna (Transmission up to 2,000ft)
- Qty. 1 - 12V Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - AC Power Adaptor (DMAC-PA)
- Qty. 1 - RCA Adaptor

EASY SWITCH RECEIVER

PN: DMAC-RHES



- Qty. 1 - Wireless Easy Switch Receiver, 4-channel
- Qty. 1 - 3dBi Antenna (Transmission up to 2,000ft)
- Qty. 1 - 12V Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - AC Power Adaptor (DMAC-PA)
- Qty. 1 - RCA Adaptor

WIRELESS TRANSMITTER

PN: DMAC-RHTX



- Qty. 1 - Wireless Transmitter, 4-channel
- Qty. 1 - 3dBi Antenna (Transmission up to 2,000ft)
- Qty. 1 - 12V Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1 - AC Power Adaptor (DMAC-PA)
- Qty. 1 - RCA Adaptor

WIRELESS PAIR W/ WATERPROOF TRANSMITTER

PN: DMAC-RHWP PAIR



- Qty. 1 - Wireless Waterproof Transmitter, 4-channel
- Qty. 1 - Wireless Receiver 4-channel
- Qty. 2 - 3dBi Antenna (Transmission up to 2,000ft)
- Qty. 2 - 12V Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 2- AC Power Adaptor (DMAC-PA)
- Qty. 1 - RCA Adaptor



WIRELESS WATERPROOF TRANSMITTER

PN: DMAC-RHWP TX

- Qty. 1 - Wireless Waterproof Transmitter, 4-channel
- Qty. 1- 3dBi Antenna (Transmission up to 2,000ft)
- Qty. 1- 12V Cigarette Lighter Power Adaptor (DMAC-12V)
- Qty. 1- AC Power Adaptor (DMAC-PA)

8DBI ONMI-DIRECTIONAL ANTENNA

PN: DMAC-WA8

- Qty. 1 - 8dBi Omni-directional Antenna
- Qty. 1- 20ft Antenna Cable (DMAC-AC20)

SPECIFICATIONS

Connector	Reverse SMA to N
Frequency Range	2.4 GHz
Cord Length	20ft
Antenna Length	17in
Transmission Distance	2+ Miles w/ line of sight



8DBI DIRECTIONAL ANTENNA

PN: DMAC-WA8P

- Qty. 1 - 8dBi Directional Antenna
- Qty. 1- 20ft Antenna Cable (DMAC-AC20)

SPECIFICATIONS

Connector	Reverse SMA to N
Frequency Range	2.4 GHz
Cord Length	20ft
Antenna Dimenstions	7in(W) x 8in(H) x 1 3/4in (D)
Transmission Distance	2+ Miles w/ line of sight



5DBI ONMI-DIRECTIONAL ANTENNA

PN: DMAC-WA5


- Qty. 1 - 5dBi Omni-directional Antenna w/ 6ft cord



WIRELESS CONNECTION DIAGRAMS


TWO CAMERA WIRELESS DIAGRAM

Transmit individual camera signals from different locations to matched receivers

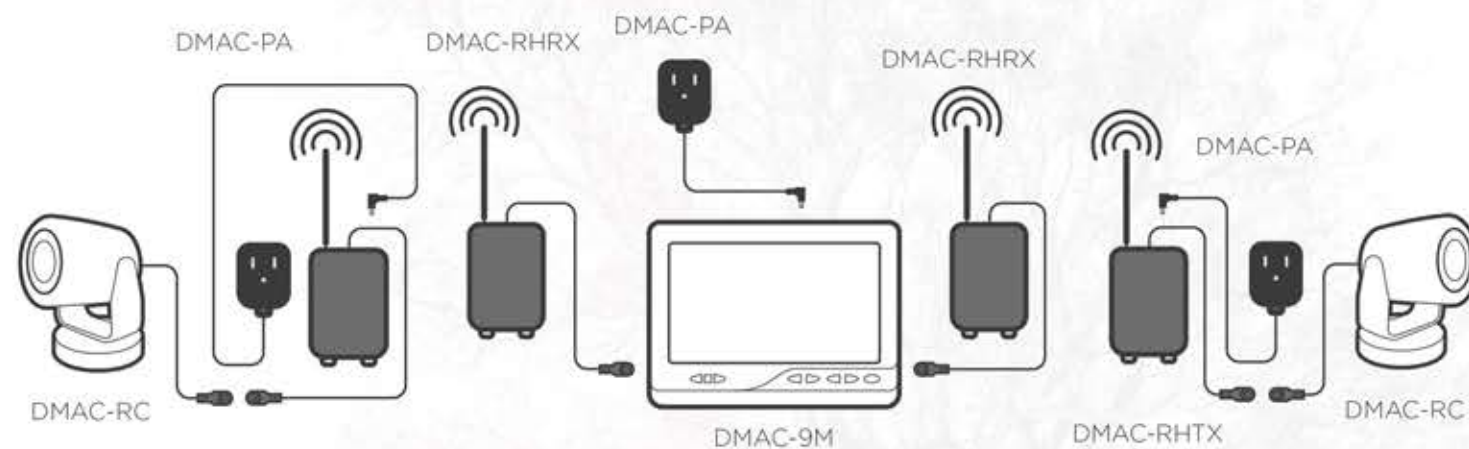

FOUR CAMERA WIRELESS DIAGRAM

Transmit 4 combined camera signals from a single transmission point to a single receiver.

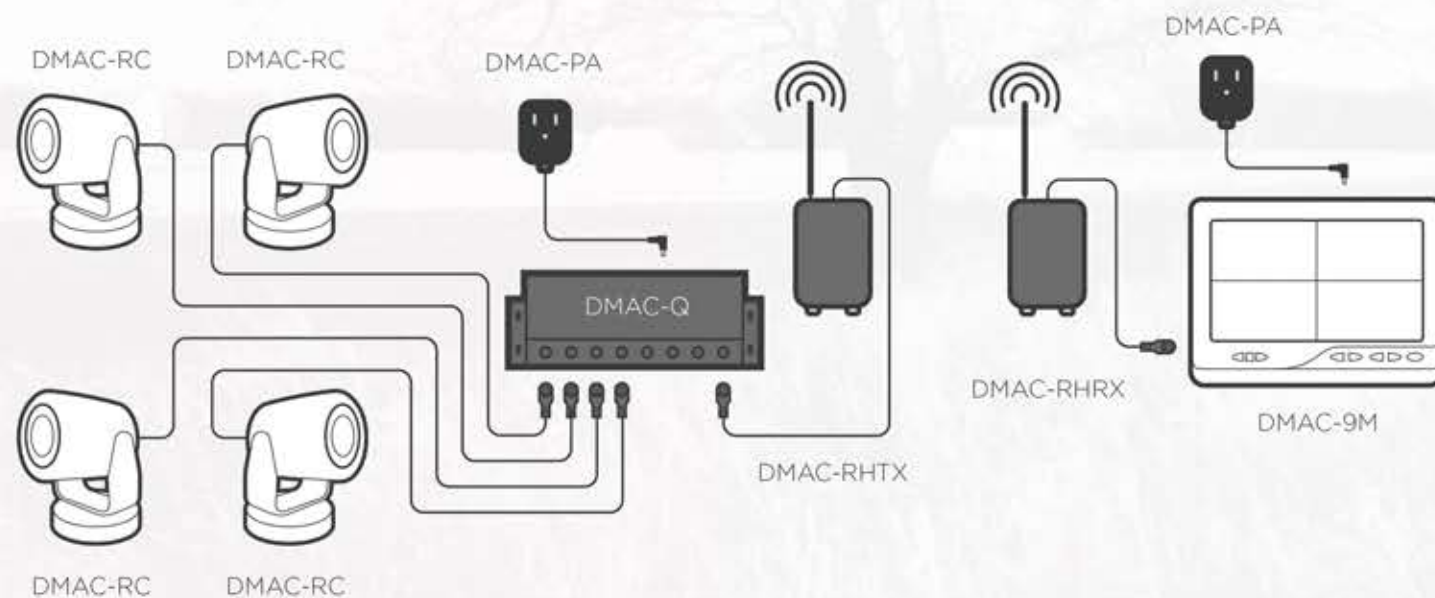

AGCAM ACCESSORIES

AGCAM POWER ACCESSORIES

- A/C POWER ADAPTOR, NORTH AMERICAN (DMAC-PA)
- A/C POWER ADAPTOR, AUSTRALIAN (DMAC-AUPA)
- A/C POWER ADAPTOR, EUROPEAN (DMAC-EUPA)
- A/C POWER ADAPTOR, UK (DMAC-UKPA)
- 12V POWER ADAPTOR (DMAC-12V)
- 12V HARDWIRE POWER ADAPTOR (DMAC-HARDWIRE)
- 12V DEUTSCH DTH 2-PIN POWER ADAPTOR (DMAC-DTH)

AGCAM SHIELDED POWER/VIDEO CABLES

- AGCAM 10FT SHIELDED POWER/VIDEO CABLE (DMAC-EC10)
- AGCAM 20FT SHIELDED POWER/VIDEO CABLE (DMAC-EC20)
- AGCAM 30FT SHIELDED POWER/VIDEO CABLE (DMAC-EC30)
- AGCAM 40FT SHIELDED POWER/VIDEO CABLE (DMAC-EC40)
- AGCAM 50FT SHIELDED POWER/VIDEO CABLE (DMAC-EC50)
- AGCAM 60FT SHIELDED POWER/VIDEO CABLE (DMAC-EC60)
- AGCAM 80FT SHIELDED POWER/VIDEO CABLE (DMAC-EC80)
- AGCAM 20FT REINFORCED POWER/VIDEO CABLE (DMAC-EC20-6CF)
- AGCAM 40FT REINFORCED POWER/VIDEO CABLE (DMAC-EC40-6CF)
- AGCAM 16FT MULTI-CAMERA POWER/VIDEO CABLE (DMAC-JCT16)
- AGCAM 1FT THRU TANK OR CAB POWER/VIDEO CABLE (DMAC-ACA1)
- AGCAM 6FT THRU TANK OR CAB POWER/VIDEO CABLE (DMAC-ACA6)
- WIRELESS 20FT ANTENNA EXTENSION CABLE (DMAC-AEC20)
- WIRELESS 20FT ANTENNA CABLE (DMAC-AC20)

AGCAM MOUNTING ACCESSORIES

- 7IN MONITOR U-BRACKET STAND (DMAC-7M BRACKET)
- 9IN MONITOR U-BRACKET STAND (DMAC-9M BRACKET)
- SUCTION CUP MONITOR MOUNT BY PANAVISE (DMAC-PV-SM)
- HARD MOUNT MONITOR MOUNT BY PANAVISE (DMAC-PV-PM)
- AGCAM CAMERA MAGNET (DMAC-CM)
- AGCAM CAMERA BRACKET KIT (DMAC-CB)
- AGCAM CAMERA MOUNTING BRACKET W/ MAGNET (DMAC-CBM)

AGCAM MISC ACCESSORIES

- AGCAM STANDARD CAMERA TAIL 36INCH (DMAC-CT)
- AGCAM CAMERA TAIL 90 DEGREE 36INCH (DMAC-CT-ANGLED)
- AGCAM ELITE CAMERA MIRROR MAGNET KIT (DMAC-FCT-K)
- AGCAM ELITE FUNCTION PLUG MAGNET KIT (DMAC-FCT-M)
- MONITOR WIRE HARNESS REPLACEMENT (DMAC-MWH)
- AGCAM MONITOR TO RCA MALE (DMAC-AV-M)
- AGCAM CAMERA TO RCA MALE (DMAC-AV-F)
- AGCAM MONITOR WIRE HARNESS W/ QUICK CONNECT (DMAC-QC-MWH)
- AGCAM CAMERA TO KINZE GRAIN CART (DMAC-QC-2ACM)
- QUAD CAMERA HARNESS (DMAC-QWH)
- QUAD POWER HARNESS (DMAC-QPH)
- AGCAM FEMALE DUSTCAP (DMAC-SWCAP)
- AGCAM MONITOR REMOTE (DMAC-REMOTE-SERIAL NUMBER)

Can We Break It .com

Since we here at Dakota Micro, Inc. claim to build the toughest camera around, we feel it's our responsibility to test it appropriately. Our methods may not always be orthodox, or come with pedigreed certification (we have them too, but they're BORING!), but they are usually interesting, sometime comical, and always answer our burning question... Can We Break it™?

Take a look, and at the very least, be entertained...and at the very best, realize that you simply cannot live without one of these cool cameras...and it's built here in the USA.

See more at: www.CanWeBreakIt.com



LOOKING FOR SOMETHING FOR YOUR JOB?

Find the Dakota Micro equipment that's right for you.

OVERVIEW

Dakota Micro, Inc.

DURACAM

Dakota Micro, Inc.

InnoPro
infrared protocol camera

- Ruggedized IP Camera Built in the U.S.A.
- IP66 - Waterproof Under Pressure
- Shockproof - Suitable for Heavy Duty Use
- 4000FPS - Subseconds
- Maximum Field of View of 90°
- Built in, High Quality 1200 Camera
- Maximum/Minimum Camera Size
- High Performance Infrared (IR) Illuminator Module
- 40 Day Effective Range of 90° in Complete Darkness
- Standard Lens Features 1/4" Flare of View at 2000'
- 12 Hour Warranty
- Cloud Compatible
- Multiple Video Stream Options
- Programmable Scheduling
- Available Ruggedized Cell Camera

Dakota Micro, Inc.

AgCam

Dakota Micro, Inc.



CAMERAS MADE IN THE U.S.A.



AgCam

www.dakotamicro.com

info@dakotamicro.com

Phone: 1-866-462-4226 (US and Canada)

Fax: 1-877-828-9479

Dakota Micro, Inc.
8659 148th Ave. SE
Cayuga, ND 58013