


Installation Guide for AgCam Camera to CNH IntelliView Three Camera Video Adaptor Cable

1. Dakota Micro, Inc. PN: **DMAC-CNH3**.
2. The adaptor cable is 70" long.
3. This adaptor cable allows for the input of up to three (3) AgCam® cameras into Case IH AFS Pro 200, AFS Pro 300, AFS Pro 700 as well as New Holland IntelliView II, IntelliView III and IntelliView IV monitors.
4. The adaptor cable looks like this:

- A. Cameras 2 & 3 (hardwire, see instructions below)
- B. Camera 1 - BNC Male
- C. Power Input
- D. 5-pin Female Switchcraft Connectors (Qty 3)

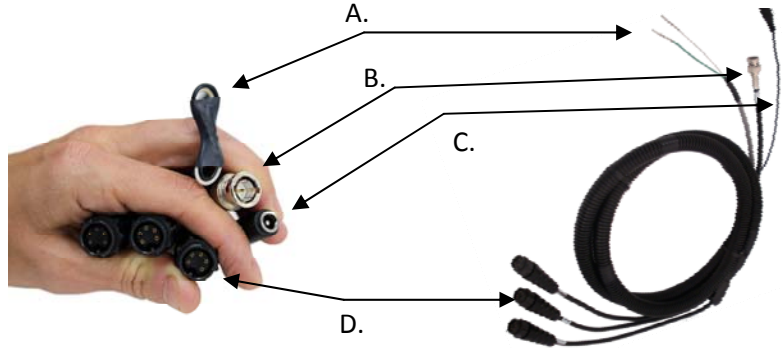

5. Camera(s)2 & 3 Outputs.

To hook the Video 2 & 3 outputs into the CNH monitors, you will need to take apart the 26 pin square bulkhead connector that goes into the back of the monitor. This connector looks like the image to the right.




- A) As much as Dakota Micro would love to be able to tell you which wires go where, wire colors and locations vary dependent upon the type of equipment and usage. We recommend you take notes on which pin holds which wire color (IE: Pin 3=brown) for your own reference should you require it.

IMPORTANT NOTE: We HIGHLY RECOMMEND that you have your dealer perform this task. If you pull any of the other pins out of position while installing this cable, DM is not responsible for informing you how and where to put them back into their appropriate position.

- B) To release the pin lock: Press the white locking tab on the top of the connector (identified with the arrow on photo below) with a firm object. Items such as a screwdriver or a coin work well. This will release ALL of the pins...**don't pull any out, DM is not responsible should you do so!!**



- C) Insert your video 2 & 3 pins into the appropriate socket (make sure all your pins are firmly seated)
 - White Wire = Video 2: Insert into socket 8
 - Black Wire = Video 3: Insert into socket 16



- D) To re-lock pins: Firmly press the dual re-lock tabs on the backside of the connector



6. This adaptor cable works with both NTSC & PAL AgCam® cameras.
7. As with all our other adaptor cables. warrantv on this item is 1 year from date of purchase.

LIMITED WARRANTY

Subject to the disclaimer, limitations and other directions stated hereafter, Dakota Micro, Inc. warrants that the Product will be free from defects in material and workmanship for periods as stated hereafter from the date of original purchase. **THIS WARRANTY IS EXPRESSLY MADE IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS. THE EXCLUSIVE REMEDY OF THE BUYER IS LIMITED TO REPAIR OR REPLACEMENT OF THE PRODUCT. EXCEPT AS STATED IN THIS WARRANTY, DAKOTA MICRO SHALL NOT BE LIABLE FOR ANY LOSS, INCONVENIENCE, OR DAMAGE, INCLUDING DIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, RESULTING FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER RESULTING FROM BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY OF ANY OTHER LEGAL THEORY.** Any oral statements or representations made by anyone which are contrary to or at variance with the terms stated in this **LIMITED WARRANTY** are void.

Dakota Micro will, at its option, either repair the defect or replace the defective Product or part thereof with a new or remanufactured equivalent at no charge to the purchaser for parts or labor for the period of one (1) year for cables and all other accessories.

The Dakota Micro limited warranty periods outlined above apply throughout the United States and Canada only. A one (1) year maximum limited warranty for all Products applies to all other geographic locations unless otherwise stated in writing by Dakota Micro.

This limited warranty does not apply to any issues connected with appearance that have no relation to the performance of the Product nor to any Product the exterior of which has been damaged or defaced, which has been subjected to improper voltage or other misuse, abnormal service or handling, or which has been altered or modified in design or construction.

In order to enforce the rights under this limited warranty, the purchaser should follow the process set forth on the Dakota Micro Warranty Repair Policy (available at dakotamicro.com). Neither the sales personnel of Dakota Micro nor any dealer or any other person is authorized to make any warranties other than those described herein, or to extend the duration of any warranties beyond the time periods described herein.

The warranties described herein shall be the sole and exclusive warranties and remedies provided by Dakota Micro. Correction of defects, in the manner and for the period of time described herein, shall constitute complete fulfillment of all liabilities and responsibilities of Dakota Micro to the purchaser with respect to the Product, and shall constitute full satisfaction of all claims. In no event shall Dakota Micro be liable or in any way responsible for any damages or defects in the Product which were caused by repairs or attempted repairs performed by anyone other than Dakota Micro.

Some states do not allow the limitation or exclusion of incidental or consequential damages, so said limitation may not apply to you. Any action at law, suit in equity, or other judicial proceeding for the enforcement of any right provided for herein or otherwise, or with respect to any claim that a purchaser may have against Dakota Micro shall be instituted only in the Courts of the State of North Dakota, either in the state district court located in Wahpeton, North Dakota or in Federal District Court location in Fargo, North Dakota. Without regard to conflicts of law principles, the laws of the state of North Dakota shall govern the interpretation and enforcement of the terms of this Limited Warranty and all aspects of the relationship between Dakota Micro and the purchaser. *This warranty gives you specific legal rights and you may also have other rights, which may vary from state to state.*